
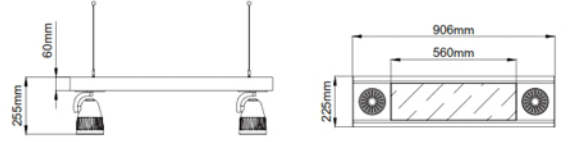



## ZSAR14120

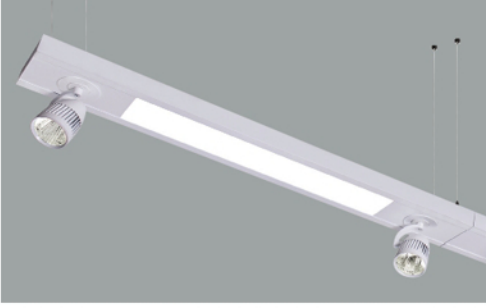

- Aluminium profile body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and switch dimming options available upon request.
- Clear safety glass and opal diffuser.
- Basic colours: white, black, silver and special color options available upon request.
- Honeycomb filter accesorie available.
- Narrow, medium and wide beam angle options available with rotationally symmetric light distribution.
- Steel suspension chain up to 5mt lenght option.

- Alüminyum profil gövde.
- Yalnızca elektronik Led trafo kullanımı için uygundur.
- 220-240V / 50-60Hz enerji giriřli.
- Akıllı sođutma tasarımı.
- 1-10V, DALI ve switch dim seçenekleri bulunmaktadır.
- Tamperli cam ve opal difüzör.
- Standart renkler: beyaz, siyah, gri ve isteđe bađlı özel renk seçeneđi mevcuttur.
- Bal peteđi filtre aksesuar seçeneđi mevcuttur.
- Simetrik ışık çıkışı sađlayan dar, orta ve geniş açđ reflektör seçenekleri mevcuttur.
- 5mt uzunluk seçeneđine kadar mevcut çelik sarkıt teli.

COB LED	Philips (39)	Tridonic (44)	SMD Led	
Led Power / Led Gücü	2x32W	2x32W	32W	
System Power / Sistem Gücü	2x35W	2x35W	34W	
Lumen Output from Fixture / Armatür Çıkış Lümeni CRI>80	2700K	6800	7200	2685
	3000K	7800	8200	2825
	4000K	8300	8500	3000
	5000K	X	X	3150
Lumen Output from Fixture / Armatür Çıkış Lümeni CRI>90	2700K	6100	6500	X
	3000K	6900	7300	X
	4000K	X	X	X
	5000K	X	X	X
Meat / Et COB	2000K	3900	3900	X
Food / Gıda COB	2500K	4500	4500	X
Mains Switch Dim Option / 220V Anahtar Dim Opsiyonu	✓	✓	✓	
1-10V Dimming Option / 1-10V Dim Seçeneđi	✓	✓	✓	
Dali Dimming Option / Dali Dim Seçeneđi	✓	✓	✓	

Honeycomb Filter	Suspension Cord
Petekli Filtre	Ray Sarkıtma Teli

