


ZYT16201



GRAY


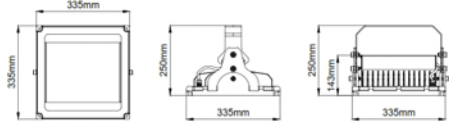


- Corrosion resistant die-cast aluminium body.
- Only to be used with electronic Led driver.
- Mains voltage: 220-240V / 50-60Hz.
- Can be used Cree XPG2 Led.
- Clever thermal design.
- 105lm/W system efficiency.
- Led colour temperatures optionally 3000K, 4000K and 5000K.
- Suitable for illumination up to 8-12 meter height.
- Dali control option available.
- Easy mounting possibility with mounting bracket.
- Reliable system with L80 B10 lifetime parameters.

POWER LED		.SYM
Led Power / Led Gücü		105W
System Power / Sistem Gücü		110W
Lumen Output from Fixture / Armatür Çıkış Lümeni CRI>80	2700K	X
	3000K	11250
	4000K	11738
	5000K	12200
Dali Dimming Option / Dali Dim Seçeneği		✓

- Korozyona dayanıklı alüminyum enjeksiyon gövde.
- Yalnızca elektronik Led trafo kullanımı için uygundur.
- 220-240V / 50-60Hz enerji girişi.
- Cree XPG2 led uyumlu.
- Akıllı soğutma tasarımı.
- 105lm/W sistem verimliliği.
- 3000K, 4000K ve 5000K renk sıcaklığı seçenekleri mevcuttur.
- 8-12 metre yüksekliğe kadar aydınlatma sağlar.
- Dali kontrol uyumlu.
- Braket sistemi ile sahada kolay montaj olanağı sağlar.
- L80 B10 ömür parametrelerine sahip güvenli sistem.

POWER LED		.SYM
Led Power / Led Gücü		170W
System Power / Sistem Gücü		177W
Lumen Output from Fixture / Armatür Çıkış Lümeni CRI>80	2700K	X
	3000K	18540
	4000K	19313
	5000K	20085
Dali Dimming Option / Dali Dim Seçeneği		✓



Symetric Lens 69° for ceiling height
8-12mt.

8-12mt. tavan yüksekliğine sahip alanlar için
Simetrik Lens 69°

